




TECHNICAL PROPERTIES



EN388

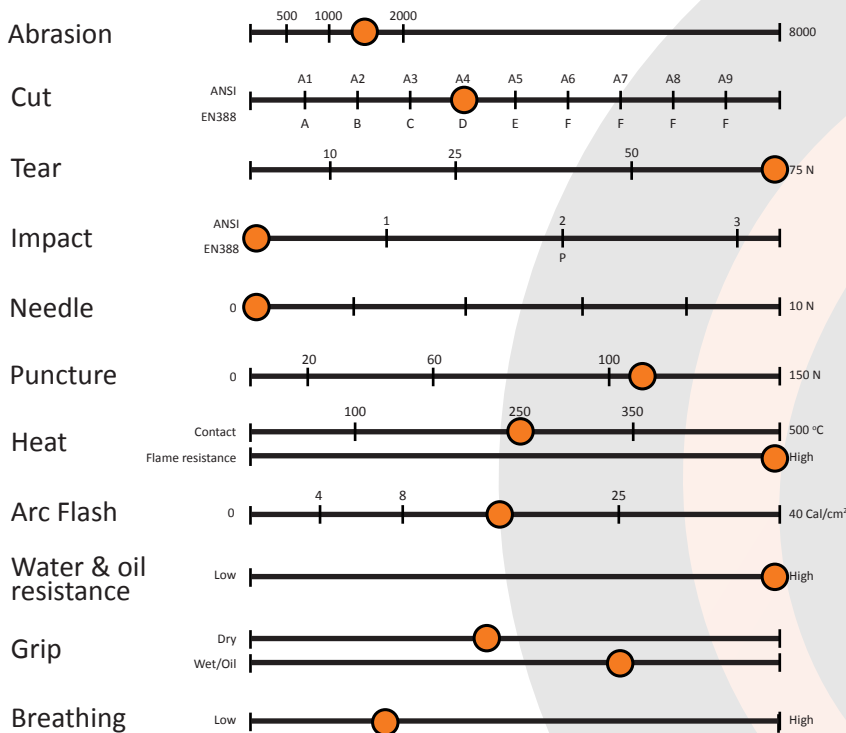

A: ABRASION (1-4)
 B: CUT (1-5)
 C: TEAR (1-4)
 D: PUNCTURE (1-4)
 F: ISO CUT (A-F)
 P: IMPACT PROTECTION

ISO (A-F)
 A | > 2 N
 B | ≥ 5 N
 C | ≥ 10 N
 D | ≥ 15 N
 E | > 22 N
 F | > 30 N

2X43D

EN407



A: FLAMMABILITY (1-4)
 B: CONTACT HEAT (1-4)
 C: CONVECTIVE HEAT (1-4)
 D: RADIAL HEAT (1-4)
 E: SMALL SPLASHES OF MOLTEN METAL (1-4)
 F: LARGE QUANTITIES OF MOLTEN METAL (1-4)

42424X

ARC FLASH

ASTM F2675, ATPV=
 12 Cal/cm²
 NFPA 70E=
 Level 2

ART.NO: 1510-4HAF-12-WP
 60 pairs (5 dozen)/Carton

CE 1493
CAT III

8	9	10	11	12
S	M	L	XL	XXL